


Louvre Series 1230

[AES-27-GL30120-AA]

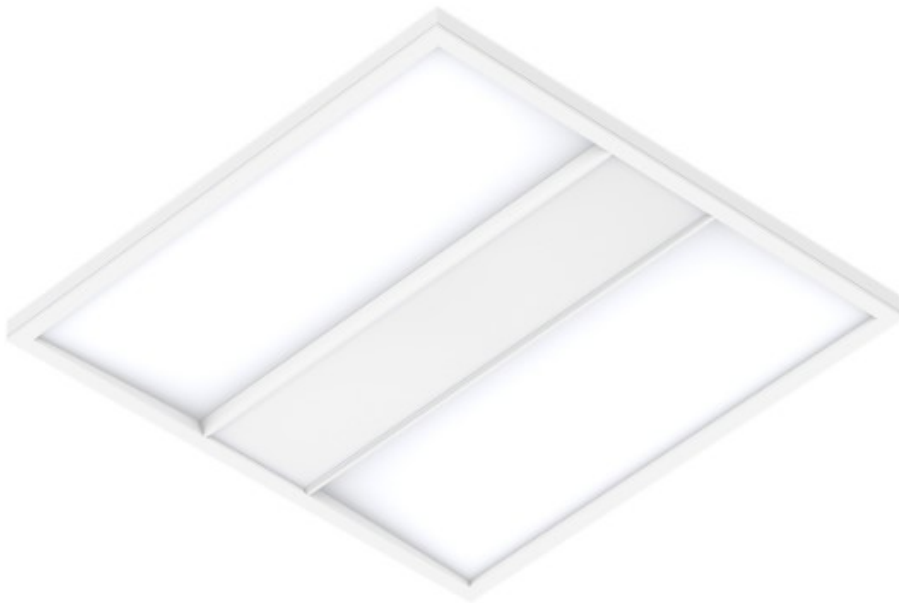

Technical Specifications

ATTRIBUTE	VALUES
Wattages	10W, 12W, TBC, 14W, 16W, 18W, 20W, 22W, 24W, 26W, 28W, 30W, 32W, 34W, 36W, 38W, 40W, 42W, 44W, 46W, 48W, 50W
Efficacy	125lm/W
Correlated Colour Index (CRI)	>80, TBC
IP Rating	20, TBC
Voltage	AC220-240V
Light Source & Brand	LED: SMD
Driver	Driver: BOKE

ATTRIBUTE	VALUES
Size - Length	Length: 1195mmL
Size - Width	Width: 595mmW
Size - Height	Height: 40mmH
Beam Angle	TBC, Beam Angle: 90°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, 1-10V Dimmable, DALI Dimmable
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K
Lens Options	TBC, MicroPrismatic Diffuser
Operating Temperature	Operating Temperature: -20°C to 45°C

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 1195mmL
Size - Height	Height: 40mmH
Beam Angle	TBC, Beam Angle: 90°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, 1-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -20°C to 45°C

Certification and Compliance

