


Louvre Series 1230

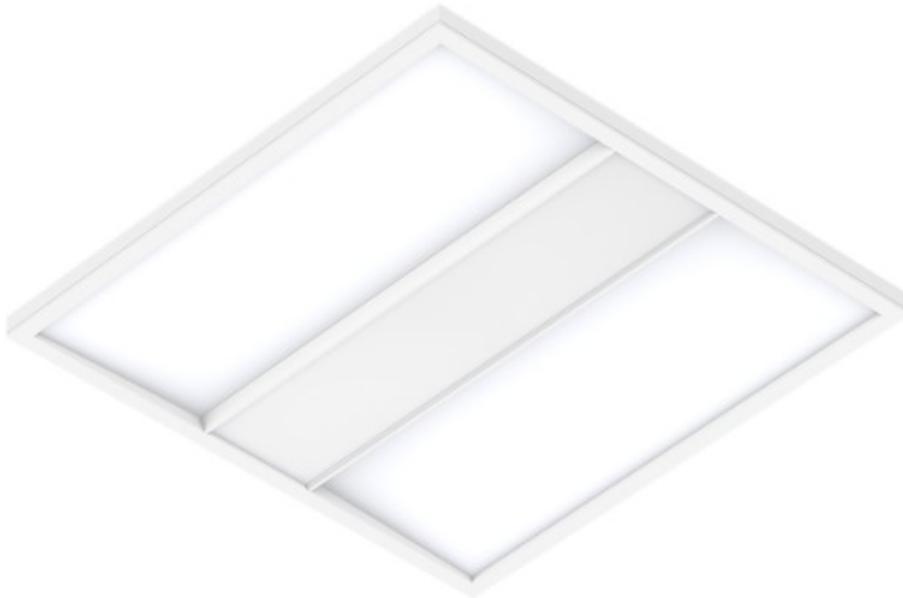

Technical Specifications

| ATTRIBUTE | VALUES |
|-------------------------------|--|
| Wattages | 10W, 12W, TBC, 14W, 16W, 18W, 20W, 22W, 24W, 26W, 28W, 30W, 32W, 34W, 36W, 38W, 40W, 42W, 44W, 46W, 48W, 50W |
| Efficacy | 125lm/W |
| Correlated Colour Index (CRI) | >80, TBC |
| IP Rating | 20, TBC |
| Voltage | AC220-240V |
| Light Source & Brand | LED: SMD |
| Driver | Driver: BOKE |
| Size - Length | Length: 1195mmL |

| ATTRIBUTE | VALUES |
|-------------------------------------|--|
| Size - Width | Width: 595mmW |
| Size - Height | Height: 40mmH |
| Beam Angle | TBC, Beam Angle: 90° |
| Dimming Options | Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, 1-10V Dimmable, DALI Dimmable |
| Correlated Colour Temperature (CCT) | CCT: 3000K, CCT: 4000K, CCT: 5000K |
| Lens Options | TBC, MicroPrismatic Diffuser |
| Operating Temperature | Operating Temperature: -20°C to 45°C |

Product Options

| ATTRIBUTE | VALUES |
|-----------------------|--|
| Size - Length | Length: 1195mmL |
| Size - Height | Height: 40mmH |
| Beam Angle | TBC, Beam Angle: 90° |
| Dimming Options | Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, 1-10V Dimmable, DALI Dimmable |
| Operating Temperature | Operating Temperature: -20°C to 45°C |

Certification and Compliance

