


Troffer Series - 1230

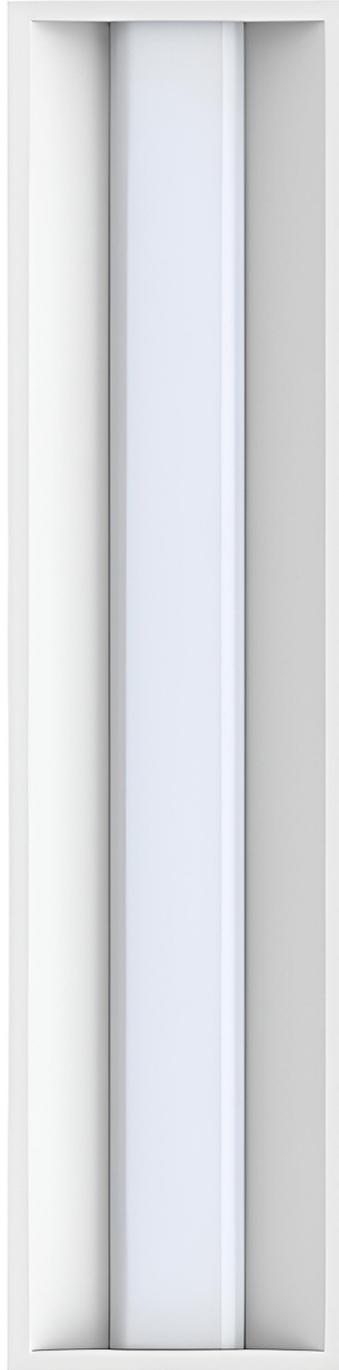

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 32W
Efficacy	115lm/W
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6
IP Rating	20, TBC
IK Rating	06
Voltage	AC220-240V
Light Source & Brand	LED: SMD 2835
Driver	Driver: Built-out
Size - Length	Length: 1195mmL
Size - Width	Width: 295mmW
Size - Height	Height: 54mmH
Weight	Weight: 2.53kg
Beam Angle	TBC, Beam Angle: 130°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Material of Housing	Housing Material: SPCC
Material of Optics- Glare control	Optics Material: PMMA + PC
Operating Temperature	Operating Temperature: -10°C to 45°C
Trim / Outer Colour	Trim/Outer: White
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K, CCT: 3CCT: 3000K+4000K+5000K
Mounting Options	TBC, Recessed
Lamp Life	Lamp Life: 50,000 hrs

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 1195mmL
Size - Height	Height: 54mmH
Beam Angle	TBC, Beam Angle: 130°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable

ATTRIBUTE	VALUES
Material of Housing	Housing Material: SPCC
Operating Temperature	Operating Temperature: -10°C to 45°C

Certification and Compliance

