


# Seacliff Series - 250

[AES-27-WL105-15]

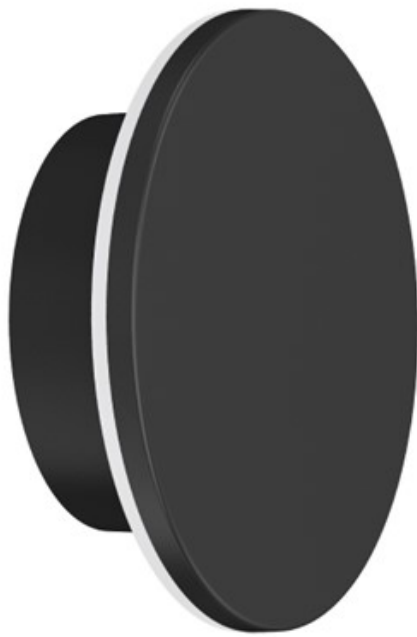

## Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 15W
Efficacy	80lm/W
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6
IP Rating	65, TBC
IK Rating	06
Voltage	AC220-240V
Driver	Driver: Built In
Light Source & Brand	LED: SMD 2835

ATTRIBUTE	VALUES
Size - Diameter	Diameter: 250mmØ
Size - Width	Width: 50mmW
Weight	Weight: 1.13kg
Beam Angle	TBC, Beam Angle: 90°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC
Material of Housing	Housing Material: Aluminum+PC transparent cover
Material of Optics- Glare control	Optics Material: Polycarbonate
Operating Temperature	Operating Temperature: -20°C to 45°C
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black, Trim/Outer: Wood Grain
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K, CCT: 3CCT: 3000K+4000K+5700K
Mounting Options	TBC, Wall Mounted
Lifetime	Reported L80 @ 55° >102,000 Hrs - As outlined within IESNA Standards, Projected Lifetime can be up to 6 x the reported lifetimes

## Product Options

ATTRIBUTE	VALUES
Size - Diameter	Diameter: 250mmØ
Beam Angle	TBC, Beam Angle: 90°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC
Material of Housing	Housing Material: Aluminum+PC transparent cover
Operating Temperature	Operating Temperature: -20°C to 45°C

## Certification and Compliance

