


# Ultimo Series - 300 - Up/Down

[AES-27-WL88-300]

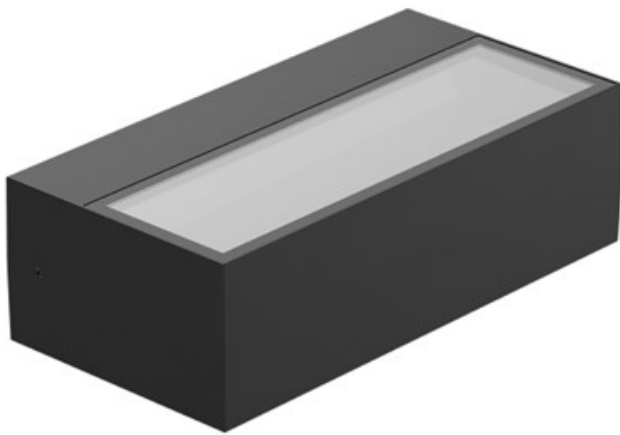

## Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 2 x 7.5W (15W), 2 x 7.5W (15) Switchable)
Efficacy	70lm/W
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6
IP Rating	65, TBC
Voltage	AC220-240V
Light Source & Brand	LED: SMD 2835
Driver	Driver: Built In
Size - Length	Length: 300mmL

ATTRIBUTE	VALUES
Size - Width	Width: 100mmW
Size - Height	Height: 60mmH
Weight	Weight: 1.09kg
Beam Angle	TBC, Beam Angle: 60° x 115° x 40°, Beam Angle: 90° x 100° x 40°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC
Material of Housing	Housing Material: Die-Casting Aluminum
Material of Optics- Glare control	Optics Material: Polycarbonate
Operating Temperature	Operating Temperature: -20°C to 45°C
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 2CCT: 3000+4000K
Mounting Options	TBC, Wall Mounted
Lamp Life	Lamp Life: L80 B10 @ 4K, CRI80

## Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 300mmL
Size - Height	Height: 60mmH
Beam Angle	TBC, Beam Angle: 60° x 115° x 40°, Beam Angle: 90° x 100° x 40°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC
Material of Housing	Housing Material: Die-Casting Aluminum
Operating Temperature	Operating Temperature: -20°C to 45°C

## Certification and Compliance

