Australian EcoTech Solutions
1/123 Merrindale Drive
Croydon South VIC 3136
Australia

Brighton Series - 30-80W

[AES-03-PL01-G3-30-80W]

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 30W, 50W, 60W, 80W
Efficacy	140lm/W
Correlated Colour Index (CRI)	>80
IP Rating	66
IK Rating	09
Voltage	AC100-277V
Light Source & Brand	LED: SMD 3030
Driver	Driver: Meanwell
Size - Length	Length: 592mmL
Size - Width	Width: 255mmW
Size - Height	Height: 133mmH

ATTRIBUTE	VALUES
Weight	Weight: 5kg
Mounting Options	TBC, Horizontal Pole Arms, Vertical Pole Arms
Beam Angle	TBC, Beam Angle: Type II-S - 151° x 81°, Beam Angle: Type II-M - 147° x 72°, Beam Angle: Type III-M - 156° x 71°, Beam Angle: Type IV-M - 100° x 65°, Beam Angle: Type V - 150°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K
Accessories	Microwave Sensor, PIR Sensor, PhotoElectric Cell, 10kV Surge Protection Device, 20kV Surge Protection Device, Short Circuit Cap
Material of Housing	Housing Material: Aluminium
Operating Temperature	Operating Temperature: -40°C to+50°C
Lifetime	Reported L80 @ 85° >72,000 Hrs - As outlined within IESNA Standards, Projected Lifetime can be up to 6 x the reported lifetimes

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 592mmL
Size - Height	Height: 133mmH
Beam Angle	TBC, Beam Angle: Type II-S - 151° x 81°, Beam Angle: Type II-M - 147° x 72°, Beam Angle: Type III-M - 156° x 71°, Beam Angle: Type IV-M - 100° x 65°, Beam Angle: Type V - 150°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Accessories	Microwave Sensor, PIR Sensor, PhotoElectric Cell, 10kV Surge Protection Device, 20kV Surge Protection Device, Short Circuit Cap
Material of Housing	Housing Material: Aluminium
Operating Temperature	Operating Temperature: -40°C to+50°C

Certification and Compliance

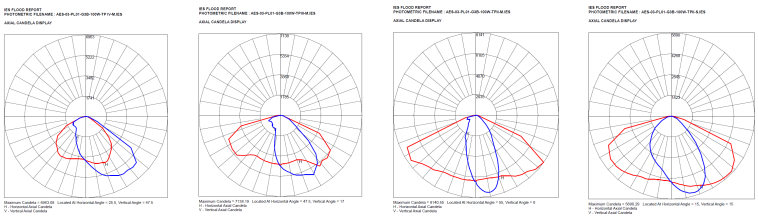

Australian EcoTech Solutions
1/123 Merrindale Drive
Croydon South VIC 3136
Australia