


Oakdale Series - 400 - Down Only

[AES-27-AL99C-400]

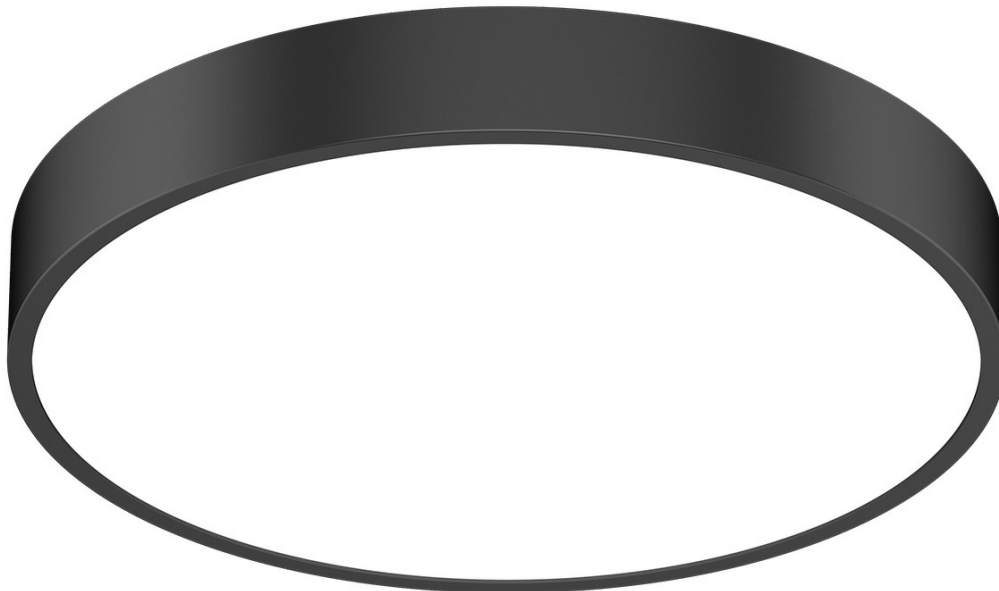

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 30W, 32W, 34W, 36W, 38W, 40W
Efficacy	100lm/W, 110lm/W
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6

ATTRIBUTE	VALUES
IP Rating	40, TBC
Voltage	AC220-240V
Light Source & Brand	LED: SMD, LED: SMD 2835
Driver	Driver: Osram, Driver: Built In
Size - Diameter	Diameter: 400mmØ
Cut Out Size - Diameter	Cut Out: 220mm-250mmØ
Size - Height	Height: 86mmH
Weight	Weight: 3.07kg
Beam Angle	TBC, Beam Angle: 85°, Beam Angle: 120°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Material of Optics- Glare control	Optics Material: Polystyrene, Microprismatic Diffuser
Operating Temperature	Operating Temperature: -20°C to +40°C
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black, Trim/Outer: Wood Grain
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K, CCT: 3CCT: 3000K+4000K+5700K
Mounting Options	Surface Mounted, TBC, Recessed, Pendant
Accessories	Microwave Sensor, Steel Wire Suspension, Pendant Rod Suspension, Wire Harness Suspension
Lamp Life	Lamp Life: L80 B10 @ 4K, CRI80

Product Options

ATTRIBUTE	VALUES
Size - Diameter	Diameter: 400mmØ
Size - Height	Height: 86mmH
Beam Angle	TBC, Beam Angle: 85°, Beam Angle: 120°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Operating Temperature	Operating Temperature: -20°C to +40°C
Accessories	Microwave Sensor, Steel Wire Suspension, Pendant Rod Suspension, Wire Harness Suspension

Certification and Compliance

