


# Neon Strip - NM3D1515 - 7.2W/m

[AES-06-NM3D1515-7.2W]

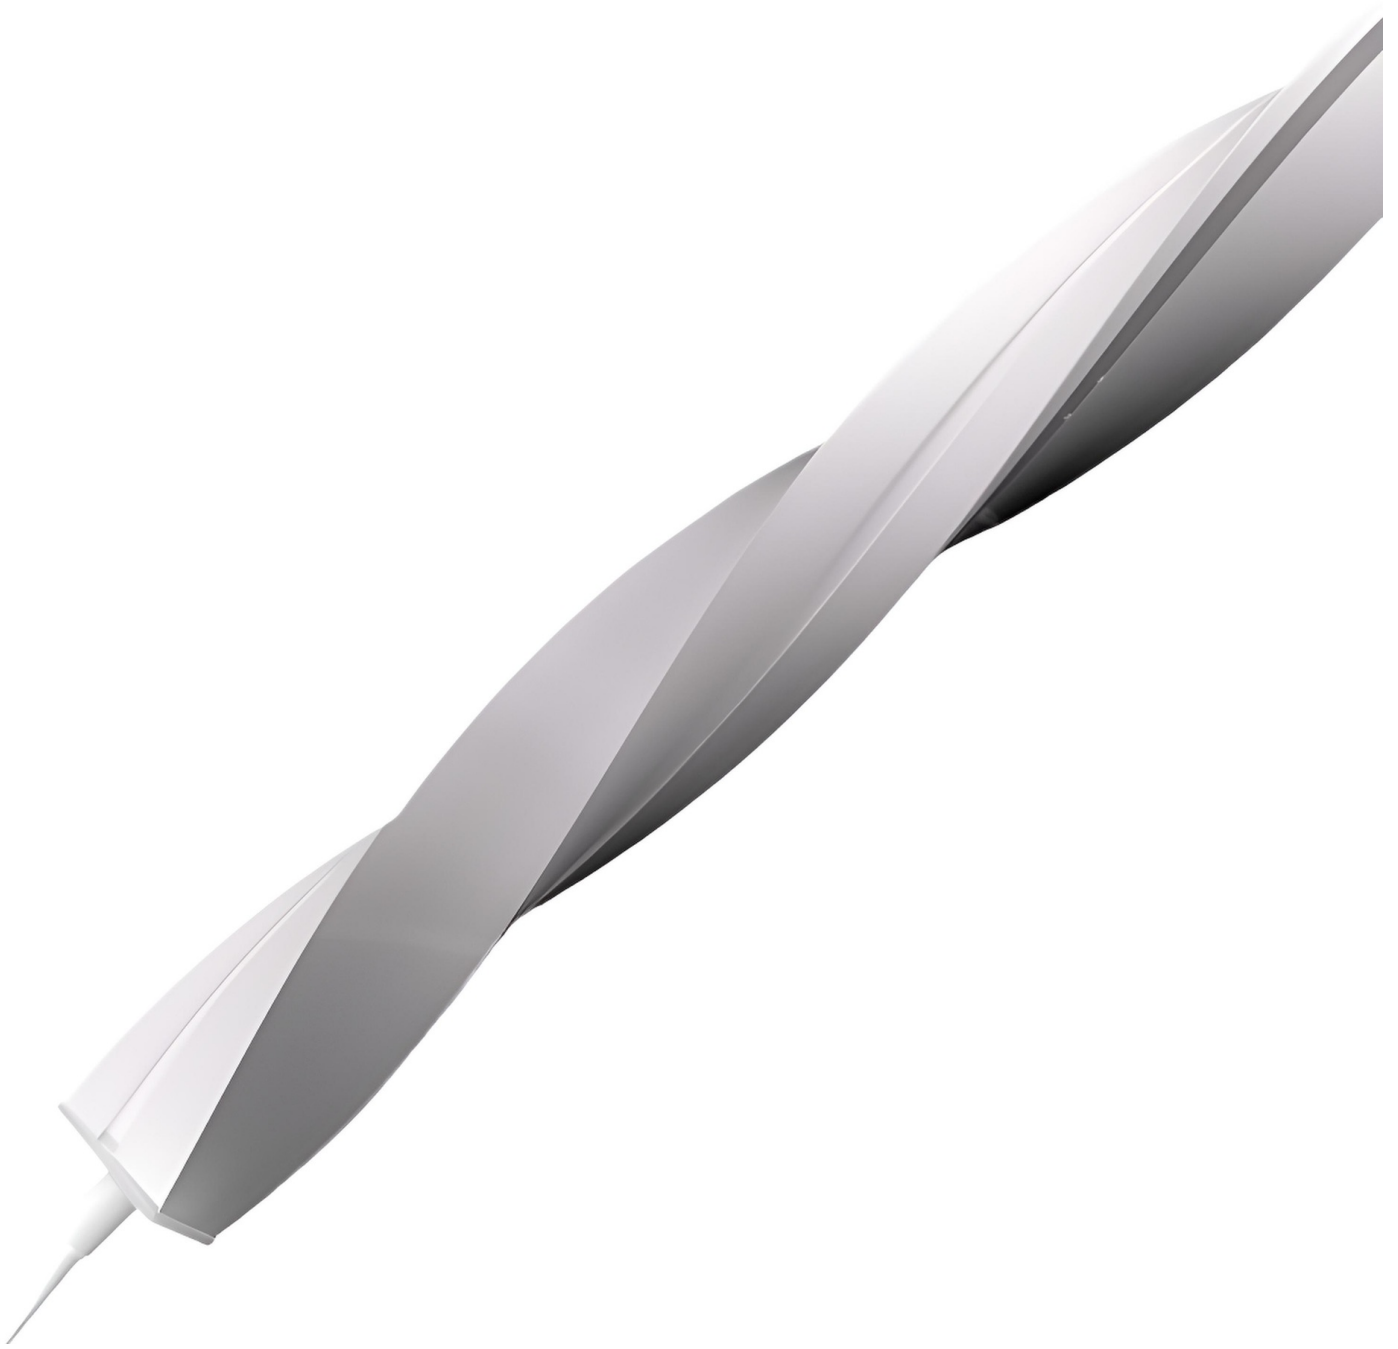

## Technical Specifications

ATTRIBUTE	VALUES
Metreage	Under 50m
Wattages	7.2W, TBC
Correlated Colour Temperature (CCT)	CCT: 2700K, CCT: 3000K, CCT: 4000K
Lumens	58lm/W @ 2700K, 61lm/W @ 3000K, 63lm/W @ 4000K
Cutting Unit	41.67mm
Correlated Colour Index (CRI)	>90, TBC
MacAdam Ellipse (SDCM)	<5
Light Source & Brand	LED: SMD
IP Rating	65, 67, TBC
IK Rating	08
Voltage	DC 24V
LED's p/m	LEDs/m: 168
Size - Width	Width: 15mmW
Size - Height	Height: 15mmH
Mounting Sleeve - Width	Mounting Sleeve: 17.4mmW
Mounting Sleeve - Height	Mounting Sleeve: 17.75mmH
Trim / Outer Colour	Trim/Outer: White
Mounting Options	Surface Mounted, TBC, Recessed
Beam Angle	TBC, Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C
Lifetime	Working Lifetime (Indoors) >60,000 Hrs - Working Lifetime (Semi-Outdoors) >36,000 Hrs

## Product Options

ATTRIBUTE	VALUES
Size - Height	Height: 15mmH
Mounting Sleeve - Width	Mounting Sleeve: 17.4mmW
Mounting Sleeve - Height	Mounting Sleeve: 17.75mmH

ATTRIBUTE	VALUES
Beam Angle	TBC, Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C

## Certification and Compliance

