


Graceville Series - Square Trimless - 196

[AES-15-DHF-ST-196]

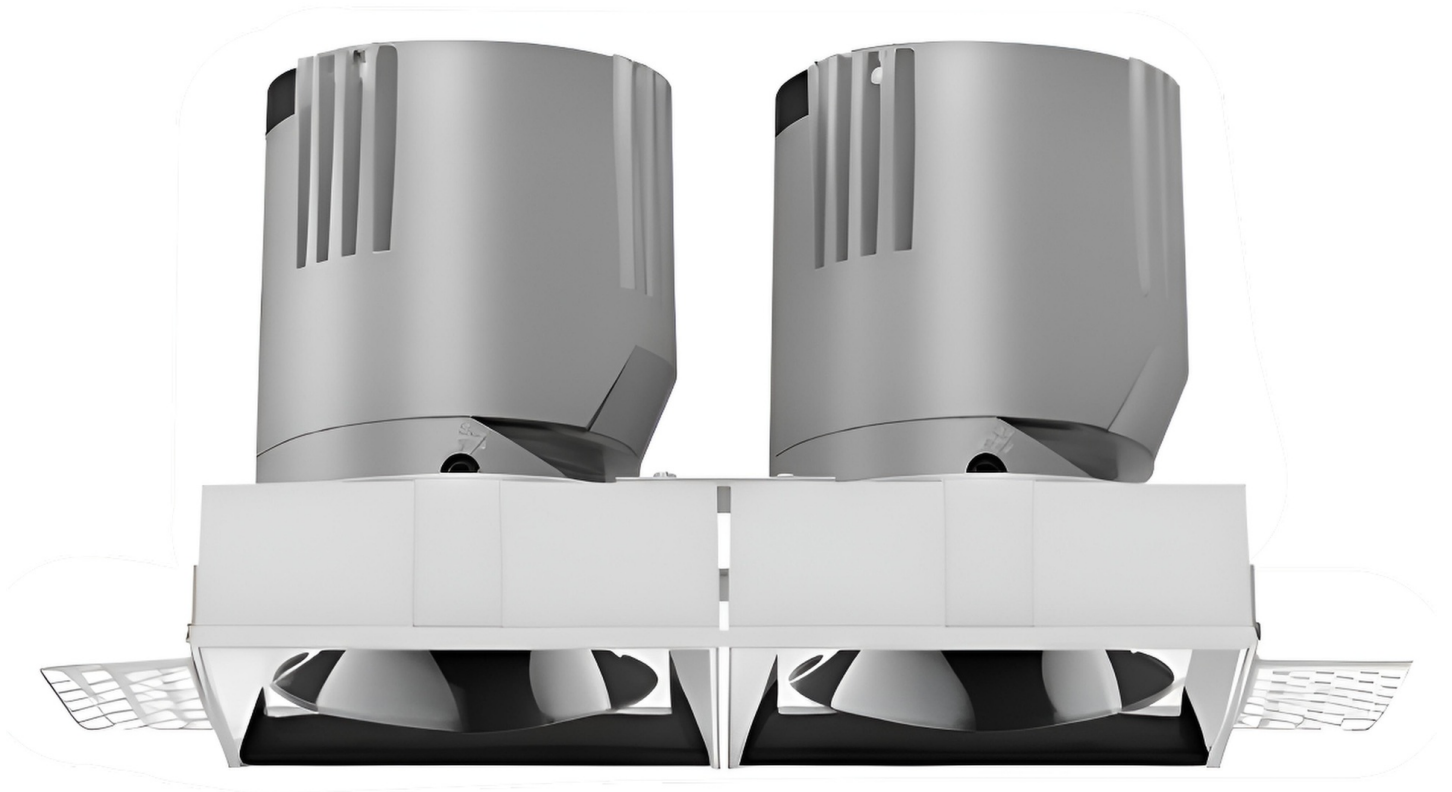

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 2 x 14W (28W), 2 x 16W (32W), 2 x 18W (36W), 2 x 20W (40W)
Efficacy	90lm/W
Correlated Colour Index (CRI)	>90, >95, >97, TBC
IP Rating	20, TBC
Voltage	AC220-240V, 50/60Hz
Light Source & Brand	LED: Bridgelux COB
Driver	Driver: Lifud, Driver: AIDimming, Driver: CUPower
Size - Length	Length: 196mmL
Size - Width	Width: 104mmW
Size - Height	Height: 116mmH
Cut Out Size - Length	Cut Out: 188mmL
Cut Out Size - Width	Mounting Sleeve: 95mmW
Tilt	Tilt: 30°
Horizontal Rotation	Horizontal Rotation: 355°
Beam Angle	TBC, Beam Angle: 15°, Beam Angle: 24°, Beam Angle: 36°, Beam Angle: 55°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Material of Housing	Housing Material: Die-Casting Aluminum
Operating Temperature	Operating Temperature: -20°C to +40°C
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black
Reflector / Internal Colour	Reflector/Internal: White, Reflector/Internal: Black, Reflector/Internal: Silver, Reflector/Internal: Gold
Correlated Colour Temperature (CCT)	CCT: 2700K, CCT: 3000K, CCT: 3500K, CCT: 4000K, CCT: 5000K, CCT: 6500K
Mounting Options	TBC, Recessed
Frame Option	Trimless
Lamp Life	Lamp Life: L80 B10 @ 4K, CRI80

Product Options

ATTRIBUTE	VALUES
-----------	--------

ATTRIBUTE	VALUES
Size - Length	Length: 196mmL
Size - Height	Height: 116mmH
Cut Out Size - Length	Cut Out: 188mmL
Cut Out Size - Width	Mounting Sleeve: 95mmW
Beam Angle	TBC, Beam Angle: 15°, Beam Angle: 24°, Beam Angle: 36°, Beam Angle: 55°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Material of Housing	Housing Material: Die-Casting Aluminum
Operating Temperature	Operating Temperature: -20°C to +40°C

Certification and Compliance

