


Aura Series 6060

[AES-27-CK5-6060]

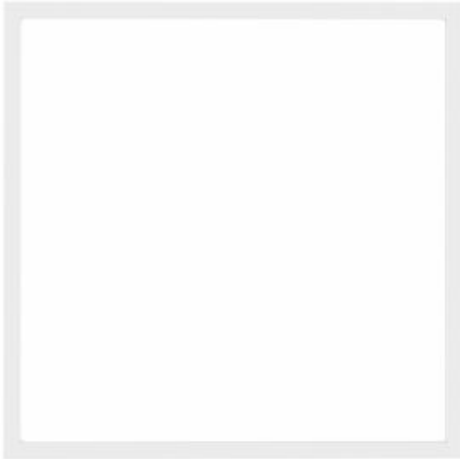

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 20W, 22W, 24W, 26W, 27W, 28W, 30W, 32W, 33W
Efficacy	120lm/W
Correlated Colour Index (CRI)	>80, >90, TBC
MacAdam Ellipse (SDCM)	<5, <3
IP Rating	40, 54, TBC
IK Rating	06
Voltage	AC220-240V
Light Source & Brand	LED: SMD 2835
Driver	Upshine
Size - Length	Length: 595mmL
Size - Width	Width: 595mmW
Size - Height	Height: 25mmH
Weight	Weight: 2.26kg
Beam Angle	TBC, Beam Angle: 90°, Beam Angle: 120°

ATTRIBUTE	VALUES
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Material of Optics- Glare control	Optics Material: PMMA
Corrosion Resistance	Corrosion Resistance: C4
Operating Temperature	Operating Temperature: -30°C to +40°C
Trim / Outer Colour	Trim/Outer: White
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K, CCT: 3CCT: 3000K+4000K+5700K
Mounting Options	Surface Mounted, TBC, Pendant, T-Bar Recessed, Plaster Recessed
Lens Options	TBC, Frosted PMMA Lens, MicroPrismatic Diffuser
Lifetime	Reported L80 @ 55° >102,000 Hrs - As outlined within IESNA Standards, Projected Lifetime can be up to 6 x the reported lifetimes

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 595mmL
Size - Height	Height: 25mmH
Beam Angle	TBC, Beam Angle: 90°, Beam Angle: 120°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Operating Temperature	Operating Temperature: -30°C to +40°C

Certification and Compliance

