


Neon Strip - NM3D1515T - 12W/m

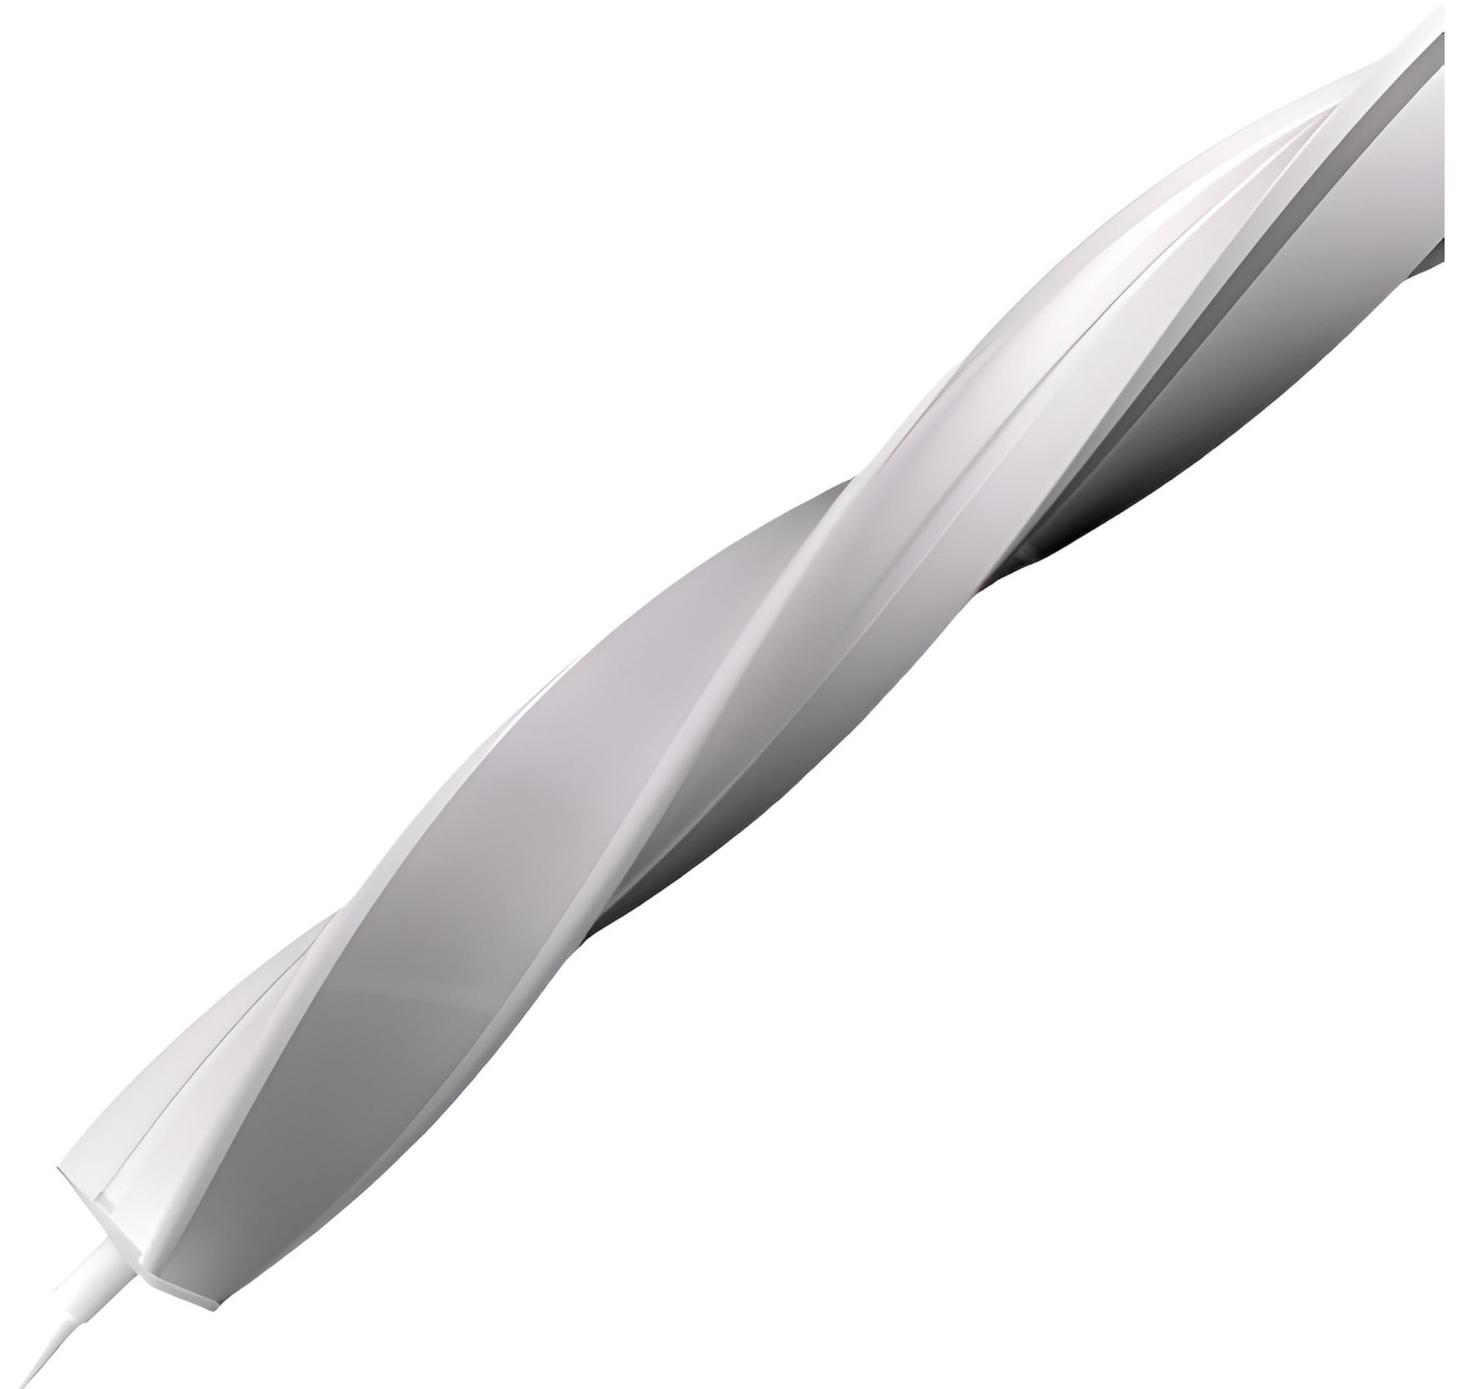

Technical Specifications

ATTRIBUTE	VALUES
Metreage	Under 50m
Wattages	12W
Correlated Colour Temperature (CCT)	CCT: 2700K, CCT: 3000K, CCT: 4000K
Lumens	67lm/W @ 2700K, 68lm/W @ 3000K, 70lm/W @ 4000K
Cutting Unit	Cutting Unit: 41.67mm
Correlated Colour Index (CRI)	CRI: >90
MacAdam Ellipse (SDCM)	SDCM: <5
Light Source & Brand	LED: SMD
IP Rating	IP65, IP67
IK Rating	IK08
Voltage	DC 24V
LED's p/m	LEDs/m: 168
Size - Width	Width: 15mmW
Size - Height	Height: 15mmH
Mounting Sleeve - Width	Mounting Sleeve: 18.6mmW
Mounting Sleeve - Height	Mounting Sleeve: 19.3mmH
Trim / Outer Colour	Trim/Outer: White
Mounting Options	Surface Mounted, Recessed
Beam Angle	Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C
Lifetime	Working Lifetime (Indoors) >60,000 Hrs - Working Lifetime (Semi-Outdoors) >36,000 Hrs

Product Options

ATTRIBUTE	VALUES
Size - Height	Height: 15mmH
Mounting Sleeve - Width	Mounting Sleeve: 18.6mmW
Mounting Sleeve - Height	Mounting Sleeve: 19.3mmH

ATTRIBUTE	VALUES
Beam Angle	Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C

Certification and Compliance

