


# Oakdale 2 Series

[AES-27-AL99D]

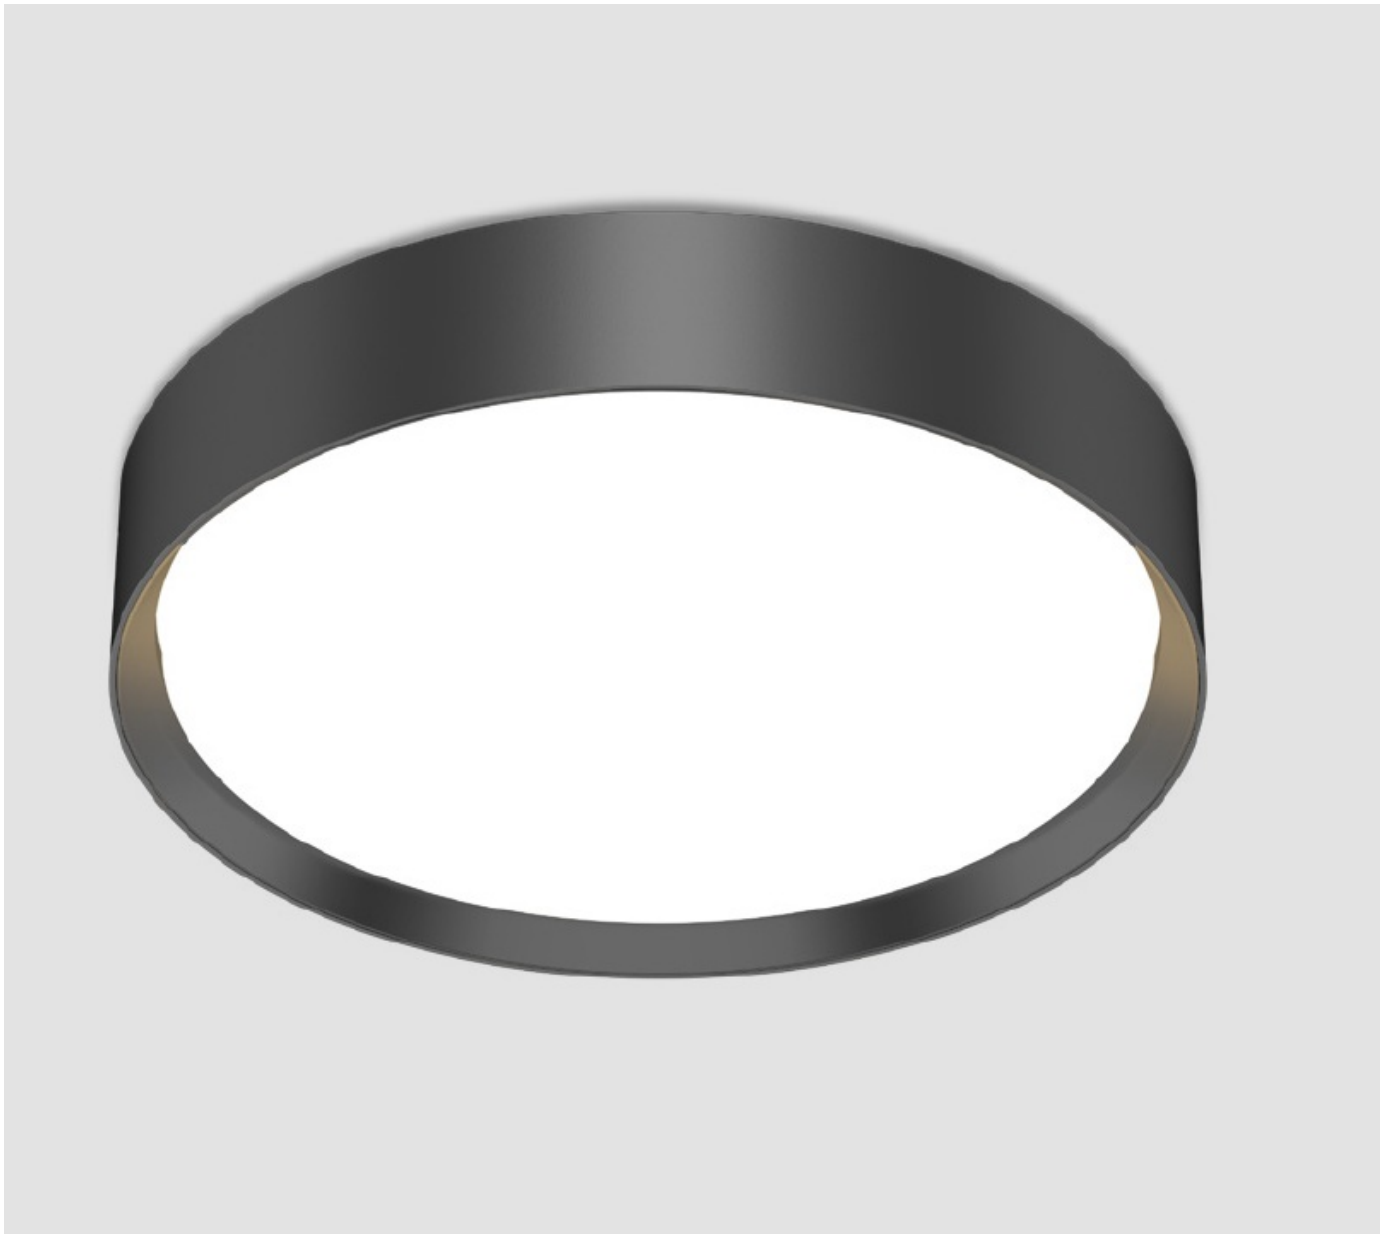

## Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 40W, 60W, 75W, 100W
Efficacy	110lm/W

03 8761 6734 sales@ausecotech.com.au <http://ausecotech.com.au> 62 487 717 179

ATTRIBUTE	VALUES
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6
IP Rating	40, TBC
IK Rating	08
Voltage	AC220-240V
Light Source & Brand	LED: SMD
Driver	Driver: Built In
Size - Diameter	Diameter: 400mmØ, Diameter: 600mmØ, Diameter: 800mmØ, Diameter: 1000mmØ
Size - Height	Height: 86mmH
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black, Trim/Outer: Wood Grain
Mounting Options	Surface Mounted, TBC, Recessed, Pendant
Beam Angle	TBC, Beam Angle: 120°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K
Accessories	Microwave Sensor, CCT Selectable Switch, Steel Wire Suspension, Pendant Rod Suspension, Wire Harness Suspension, Emergency, Emergency + Sensor
Material of Housing	Housing Material: Polystyrene
Lens Options	TBC, Curved Diffuser, MicroPrismatic Diffuser

## Product Options

ATTRIBUTE	VALUES
Size - Diameter	Diameter: 400mmØ, Diameter: 600mmØ, Diameter: 800mmØ, Diameter: 1000mmØ
Size - Height	Height: 86mmH
Beam Angle	TBC, Beam Angle: 120°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Accessories	Microwave Sensor, CCT Selectable Switch, Steel Wire Suspension, Pendant Rod Suspension, Wire Harness Suspension, Emergency, Emergency + Sensor
Material of Housing	Housing Material: Polystyrene

## Certification and Compliance

