


Neon Strip - NMSD1010

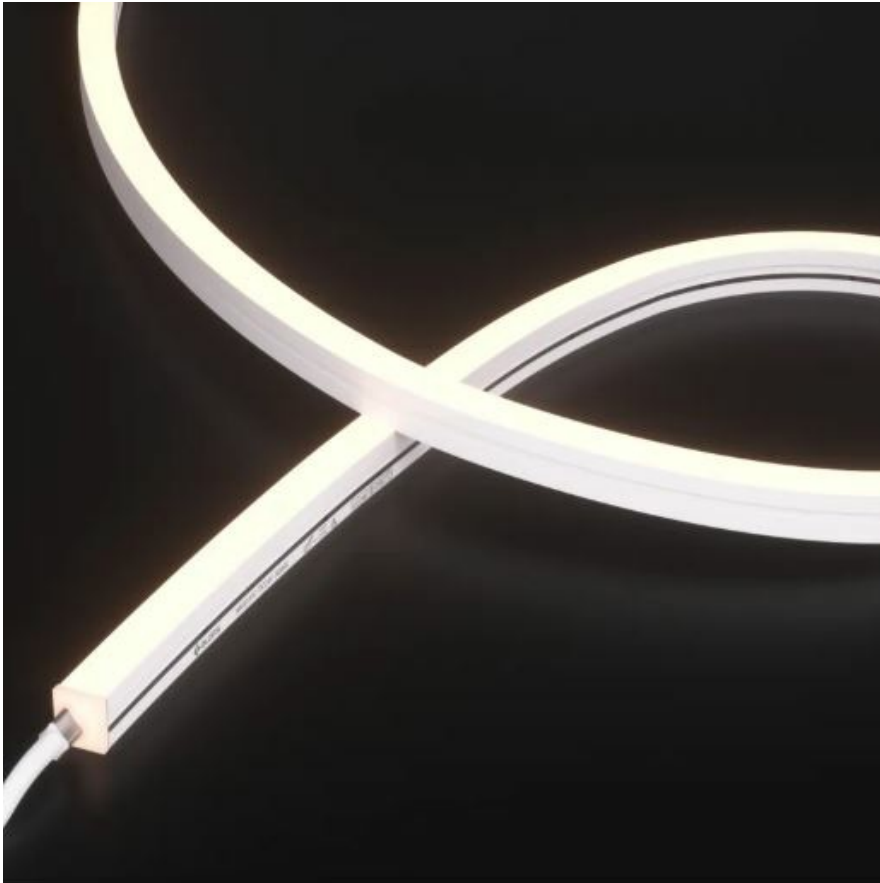

Technical Specifications

ATTRIBUTE	VALUES
Metreage	Under 50m
Wattages	7.2W
Correlated Colour Temperature (CCT)	CCT: 2300K, CCT: 2700K, CCT: 3000K, CCT: 3500K, CCT: 4000K
Lumens	320lm/M @ 2300K, 350lm/M @ 2700K, 350lm/M @ 3000K, 370lm/M @ 3500K, 370lm/M @ 4000K
Cutting Unit	5.95mm
Correlated Colour Index (CRI)	>90
MacAdam Ellipse (SDCM)	<5
Light Source & Brand	LED: SMD

ATTRIBUTE	VALUES
IP Rating	67
IK Rating	08
Voltage	DC 24V
LED's p/m	544
Size - Width	Width: 10mmW
Size - Height	Height: 10mmH
Mounting Sleeve - Width	Mounting Sleeve: 12mmW
Mounting Sleeve - Height	Mounting Sleeve: 12.3mmH
Trim / Outer Colour	Trim/Outer: White
Mounting Options	Surface Mounted, TBC, Recessed
Beam Angle	TBC, Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C
Lifetime	Working Lifetime (Indoors) >60,000 Hrs - Working Lifetime (Semi-Outdoors) >36,000 Hrs

Product Options

ATTRIBUTE	VALUES
Size - Height	Height: 10mmH
Mounting Sleeve - Width	Mounting Sleeve: 12mmW
Mounting Sleeve - Height	Mounting Sleeve: 12.3mmH
Beam Angle	TBC, Beam Angle: 110°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Operating Temperature	Operating Temperature: -40°C to+50°C

Certification and Compliance

