


Steel Series Panel 1230

[AES-34-PA30W-30120]

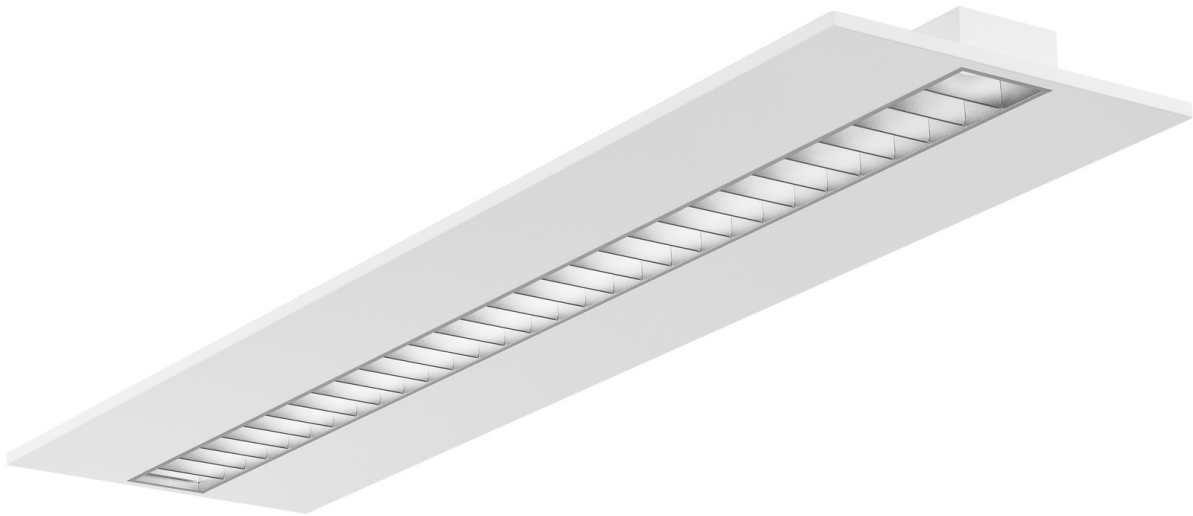

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 14W, 16W, 18W, 20W, 22W, 24W, 26W, 28W, 30W
Efficacy	140lm/W
Correlated Colour Index (CRI)	>80
MacAdam Ellipse (SDCM)	<4, <3
IP Rating	20
IK Rating	06
Voltage	AC220-240V- DC30 -42v
Light Source & Brand	LED: San'an SMD 2835
Driver	Driver: BOKE

03 8761 6734 sales@ausecotech.com.au <http://ausecotech.com.au> 62 487 717 179

ATTRIBUTE	VALUES
Size - Length	Length: 1195mmL
Size - Width	Width: 295mmW
Size - Height	Height: 11mmH
Weight	Weight: 3.76kg
Beam Angle	Beam Angle: 90°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Material of Optics- Glare control	Optics Material: PMMA
Corrosion Resistance	Corrosion Resistance: C4
Operating Temperature	Operating Temperature: -30°C to +40°C
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black
Reflector / Internal Colour	Reflector/Internal: Opal
Correlated Colour Temperature (CCT)	CCT: 2800K, CCT: 3000K, CCT: 3500K, CCT: 4000K, CCT: 4500K, CCT: 5000K, CCT: 5500K, CCT: 6000K, CCT: 6500K, CCT: 3CCT: 3000K+4000K+5000K
Mounting Options	Surface Mounted, TBC, T-Bar Recessed, Plaster Recessed
Lamp Life	Lamp Life: L80 B10 @ 4K, CRI80

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 1195mmL
Size - Height	Height: 11mmH
Beam Angle	Beam Angle: 90°
Dimming Options	Non-Dimmable, TBC, DALI Dimmable
Material of Housing	Housing Material: Aluminium
Operating Temperature	Operating Temperature: -30°C to +40°C

Certification and Compliance

