


Tabooba Series - 860

[AES-27-ML01-860]

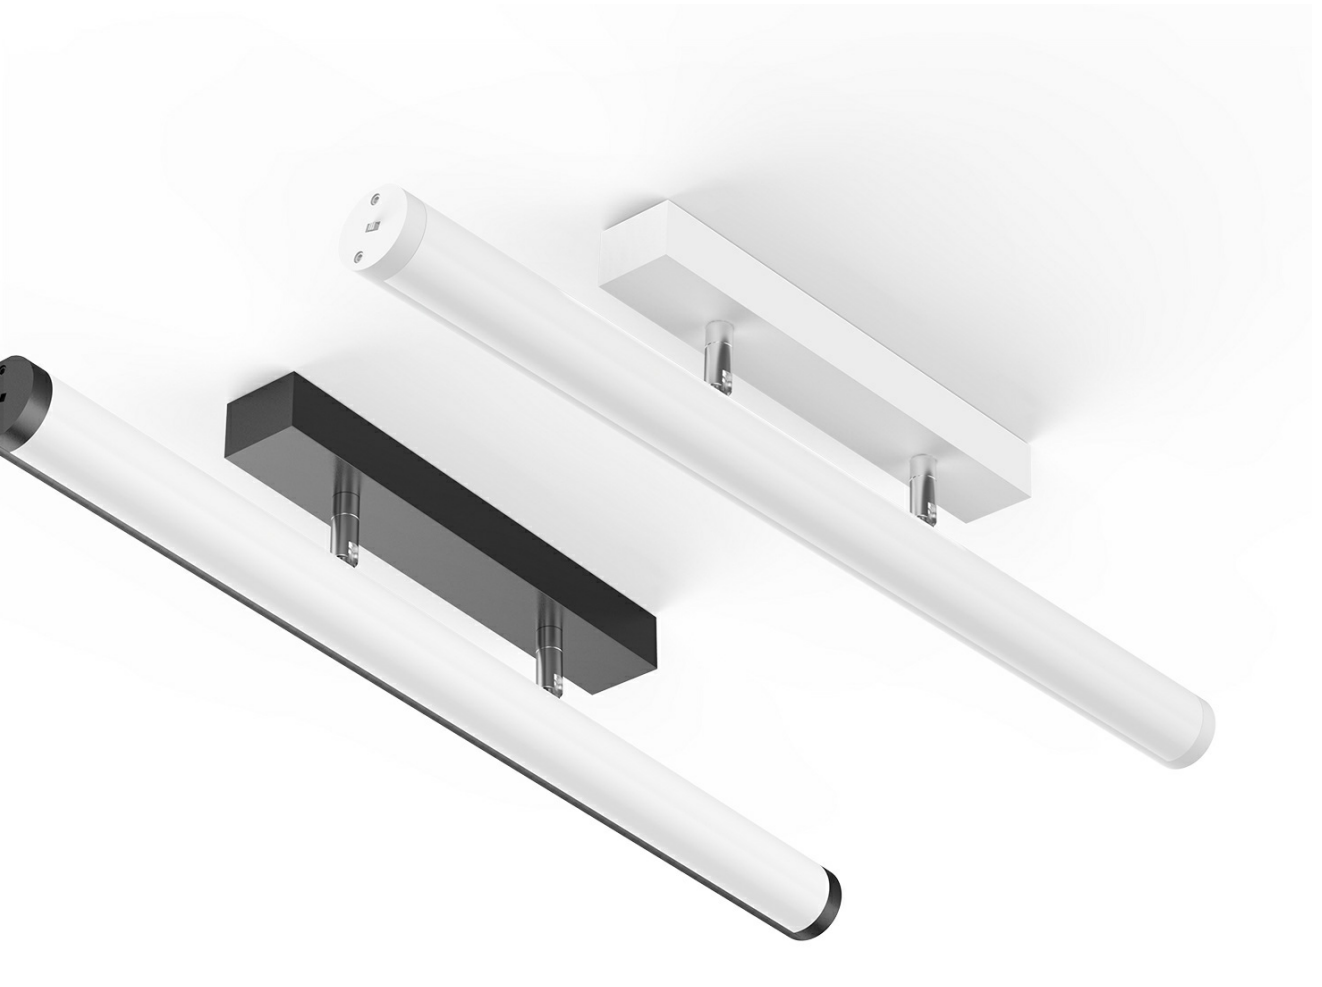

Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 15W, 20W
Efficacy	110lm/W
Correlated Colour Index (CRI)	>80, TBC
MacAdam Ellipse (SDCM)	<6
IP Rating	20, TBC

03 8761 6734 sales@ausecotech.com.au <http://ausecotech.com.au> 62 487 717 179

ATTRIBUTE	VALUES
IK Rating	08
Voltage	AC220-240V
Light Source & Brand	LED: SMD
Driver	Driver: Built In
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black
Size - Length	Length: 860mmL, Length: 1140mmL
Size - Width	Width: 41mmW
Size - Height	Height: 111mmH
Mounting Options	TBC, Wall Mounted
Beam Angle	TBC, Beam Angle: 120°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 5700K, CCT: 3CCT: 3000K+4000K+5000K
Accessories	CCT Selectable Switch
Material of Housing	Housing Material: Polycarbonate

Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 860mmL, Length: 1140mmL
Size - Height	Height: 111mmH
Beam Angle	TBC, Beam Angle: 120°
Dimming Options	Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Accessories	CCT Selectable Switch
Material of Housing	Housing Material: Polycarbonate

Certification and Compliance

