


Gamboola Series - 600

[AES-12-BO16010C-600]

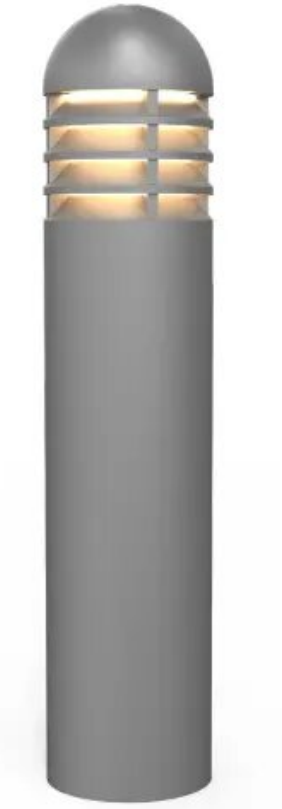

Technical Specifications

| ATTRIBUTE | VALUES |
|-------------------------------|-------------------------------|
| Wattages | 10W, 13W, TBC, 15W |
| Efficacy | 80lm/W |
| Correlated Colour Index (CRI) | >80, >90, TBC |
| MacAdam Ellipse (SDCM) | <5, <3 |
| IP Rating | 65, TBC |
| IK Rating | 08 |
| Voltage | AC220-240V |
| Light Source & Brand | LED: Osram SMD, LED: CREE SMD |
| Size - Diameter | Diameter: 160mmØ |

| ATTRIBUTE | VALUES |
|-------------------------------------|--|
| Size - Height | Height: 600mmH |
| Trim / Outer Colour | Trim/Outer: Black, Trim/Outer: Silver, Trim/Outer: Grey, Trim/Outer: Cream |
| Beam Angle | TBC, Beam Angle: 120° |
| Dimming Options | Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable |
| Correlated Colour Temperature (CCT) | CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 6000K |
| Material of Housing | Housing Material: Aluminium |
| Operating Temperature | Operating Temperature: -30°C to +50°C |

Product Options

| ATTRIBUTE | VALUES |
|-----------------------|--|
| Size - Diameter | Diameter: 160mmØ |
| Size - Height | Height: 600mmH |
| Beam Angle | TBC, Beam Angle: 120° |
| Dimming Options | Non-Dimmable, Triac Dimmable, TBC, 0-10V Dimmable, DALI Dimmable |
| Material of Housing | Housing Material: Aluminium |
| Operating Temperature | Operating Temperature: -30°C to +50°C |

Certification and Compliance

