


# Salem Series - 1500 x 28W

[AES-25-BT200-05-28]

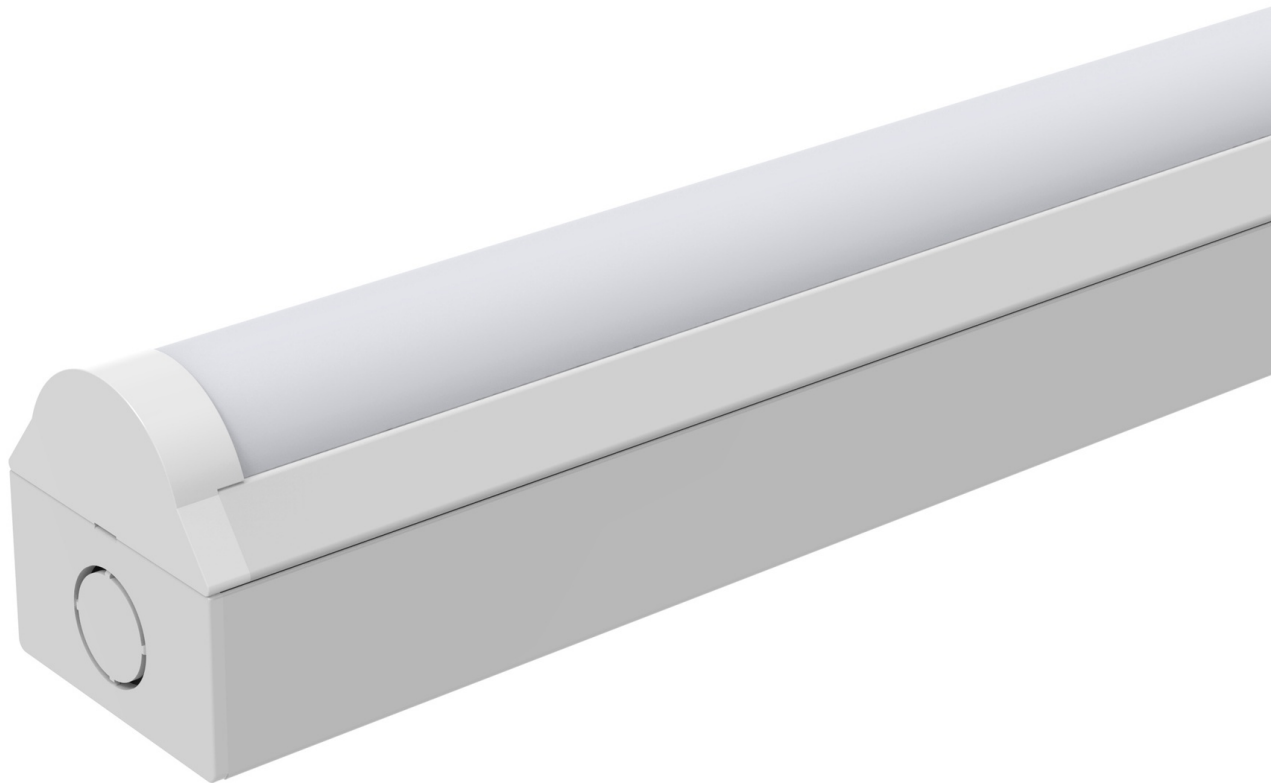

## Technical Specifications

ATTRIBUTE	VALUES
Wattages	TBC, 28W
Efficacy	125lm/W, 140lm/W, 160lm/W
Correlated Colour Index (CRI)	>80, TBC
IP Rating	40, TBC
IK Rating	04
MacAdam Ellipse (SDCM)	<5
Voltage	AC220-240V
Light Source & Brand	LED: SMD
Driver	Driver: BOKE
Size - Length	Length: 1500mmL
Size - Width	Width: 55mmW
Size - Height	Height: 58mmH
Trim / Outer Colour	Trim/Outer: White, Trim/Outer: Black, Trim/Outer: Grey
Mounting Options	Surface Mounted, TBC, Recessed
Dimming Options	Non-Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Beam Angle	TBC, Beam Angle: 120°
Correlated Colour Temperature (CCT)	CCT: 3000K, CCT: 4000K, CCT: 5000K, CCT: 6000K
Accessories	Microwave Sensor, CCT Selectable Switch, Emergency
Lens Options	Polycarbonate Diffuser, TBC
Operating Temperature	Operating Temperature: -15°C to 40°C

## Product Options

ATTRIBUTE	VALUES
Size - Length	Length: 1500mmL
Size - Height	Height: 58mmH
Dimming Options	Non-Dimmable, TBC, 0-10V Dimmable, DALI Dimmable
Beam Angle	TBC, Beam Angle: 120°
Accessories	Microwave Sensor, CCT Selectable Switch, Emergency
Operating Temperature	Operating Temperature: -15°C to 40°C

## Certification and Compliance

